

# MIRBI long IP44

28-May-2019

## 1.0 LED

LED 6W | 220-240VAC | 50-60Hz | PCB 3-step | incl. PS | output selector | phase-cut dim  
 CE IP44 0,3m

white texture 329184W\_

### LIGHT COLOUR

2700K | >90CRI | H300/L190lm 3  
 3000K | >90CRI | H330/L210lm 5

## 2.0 LED

LED 12W | 220-240VAC | 50-60Hz | PCB 3-step | incl. PS | output selector | phase-cut dim  
 CE IP44 0,3m

white texture 329284W\_

### LIGHT COLOUR

2700K | >90CRI | H550/L320lm 3  
 3000K | >90CRI | H620/L365lm 5

## 3.0 LED


LED 18W | 220-240VAC | 50-60Hz | PCB 3-step | incl. PS | output selector | phase-cut dim  
 CE IP44 0,3m

white texture 329384W\_





### LIGHT COLOUR

2700K | >90CRI | H750/L550lm 3  
 3000K | >90CRI | H840/L610lm 5


Mounting Base:

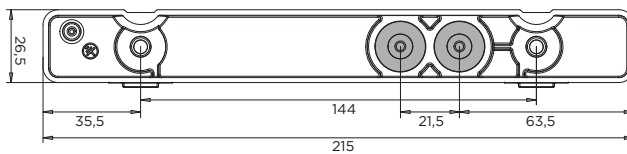

**The light source of the integrated LED is not replaceable;  
 When the light source reaches its end of life the whole  
 luminaire should be replaced.**

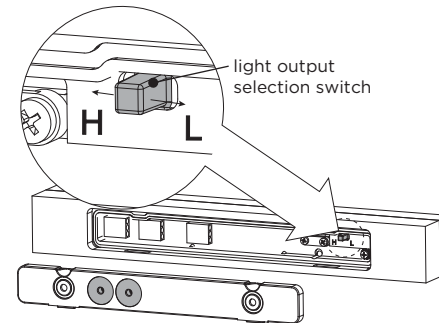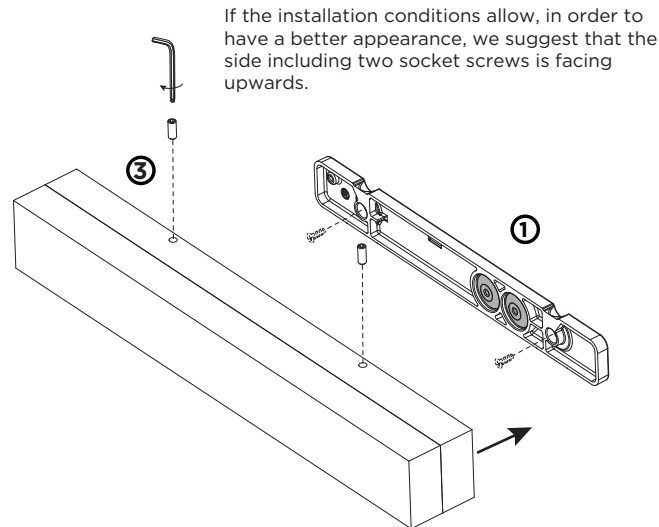


## DIMENSIONS

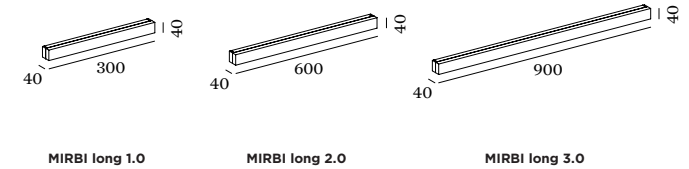

## MOUNTING INSTRUCTION

- Remove the mounting base from the MIRBO and mount it on the wall with screws.
- POWER CONNECTION**  
 Connect the power supply connection: STANDARD version
- Fixate the luminaire on the base with 2 socket screws.



	A	B	C
use appropriate tool			
CABLE			
TYPE	ROUND H05RN-F H07RN8-F H07RN-F	ROUND H05RN-F	ROUND
OUTSIDE Ø	min 6.8mm max 8.9mm	min 5mm max 6.8mm	min 1.5mm max 2.6mm
CONDUCTION SECTION	2or3x 0.75mm <sup>2</sup> 2or3x 1.0mm <sup>2</sup> 2or3x 1.5mm <sup>2</sup>	2or3x 0.75mm <sup>2</sup> 2x 1.0mm <sup>2</sup>	0.75mm <sup>2</sup> 1.5mm <sup>2</sup>