

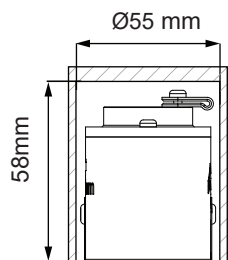


Smart 48 IP LED GE

128610XX - 128611XX - 128612XX
 128710XX - 128711XX - 128712XX
 128810XX - 128811XX - 128812XX

Lamptype:LED



1




Ø44mm
 (gips/gypsum/gypse/gips/yeso/gesso/rinc)
 Ø46mm
 (hout/wood/bois/Holz/madera/legno/древесины)

2


350mA - min 2,5Vf - max 3Vf - 0,95W
 500mA - min 2,5Vf - max 3Vf - 1,38W

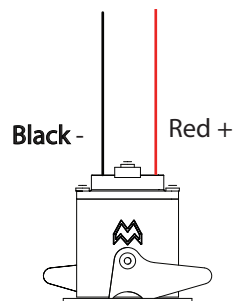


Serial connection

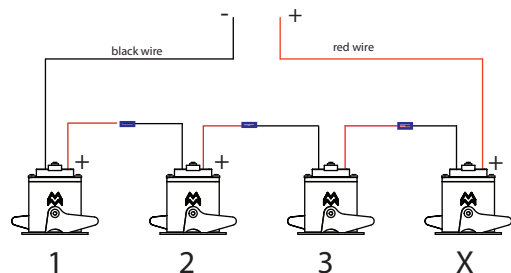


3

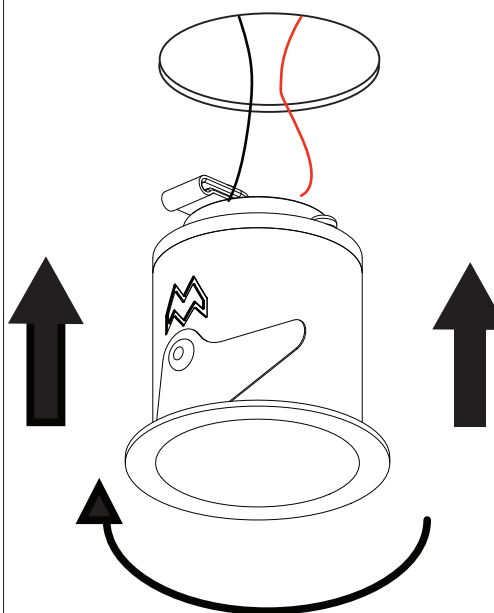


Twist counterclockwise to put through hole then twist clockwise to fixate



4

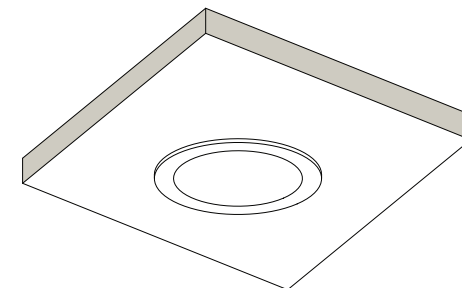

- Drivers: see driver matrix - latest version on website www.supermodular.com or check sales contact

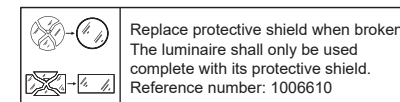

CAN BE USED WITH

-Surface Tubed: 129000XX
 -Gypkit: 12290730
 -Conbox: 10889530

