

FLOS

■ F0275000 Black

Noctambule Suspension 4 Low Cylinder Bowl

Designed by Konstantin Grcic, 2019


63W - 1579lm - 2700K - CRI> 90



Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

| | |
|-------------------|---------------------|
| EAN | 8059607000700 |
| Mounting | Suspension |
| Environments | Indoor dry location |
| Light Source Type | LED |
| LED type | LED Module |
| Power (W) | 63 |
| System flux (lm) | 1579 |

Physical

| | |
|-----------------------|-------|
| Colour | Black |
| Length (mm) | 250 |
| Cord length (mm) | 4000 |
| Canopy dimension (mm) | 45 |
| Canopy width (mm) | 187 |
| Net weight (kg) | 21.2 |
| Package height (mm) | 0 |
| Package width (mm) | 0 |
| Package length (mm) | 0 |
| Package volume (m3) | 0.62 |
| IP internal | 20 |

Download


| | |
|-----------------------|-----------------------|
| Mounting instructions | ↓ PDF |
| Mounting instructions | ↓ PDF |
| Spare Parts | ↓ PDF |

Photometric Files


| | |
|-----------|-----------------------|
| LDT / IES | ↓ ZIP |
|-----------|-----------------------|

Technical Drawings

| | |
|-----|-----------------------|
| 3D | ↓ ZIP |
| Bim | ↓ ZIP |

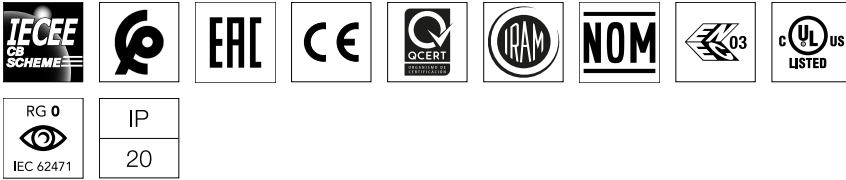

Schematic light drawing



Luminous flux luminaire
286 lm

Photometric


| | |
|--------------------|-----------|
| Lighting type | Total |
| Light distribution | Symmetric |
| CCT (K) | 2700 |
| CRI> | 90 |

Electrical


| | |
|----------------------|---|
| Insulation class | I |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 120-277 |
| LED voltage Vf (Vdc) | null |
| Driver | Integrated |
| Dimmable | Yes |
| Dimming type | Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1 |
| Dimming interface | Remote Dimmable (Dimmer Not Included) |
| Batteries inside | No |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts



- | | | |
|-----|--|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF0410300 |
| 03. | Noctambule ceiling rose cover | RF27422 |
| 04. | Suspension attack | F0253030 |
| 05. | Ring led diffuser | RF27498 |
| 06. | Fixing screws kit | RF0254100 |
| 07. | Noctambule Low Cylinder | F0254000 |
| 10. | Noctambule Bowl | F0255000 |

DOWNLOAD



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF0410300
Led dimmer kit



RF27422
Noctambule ceiling rose cover



F0253030
Suspension attack



RF27498
Ring led diffuser



RF0254100
Fixing screws kit



F0254000
Noctambule Low Cylinder



F0255000
Noctambule Bowl