

FLOS

F1491009 Polycarbonate

Mini Button

Designed by Piero Lissoni, 2005



Halogen - 25W

Wall or ceiling fixture providing diffused lighting suitable for indoor and outdoor use. Silicone elastomer dust and waterproof seal. Die-cast aluminum lamp body and wall fitting. Diffuser available in opaline glass (IP40) or polycarbonate (IP44).

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607015209
Mounting	Ceiling and wall surface
Environments	Indoor Outdoor wet location
Light Source Type	Bulb
Lamp category	Halogen
Lamp holders	G9
Iicos	HSGS
Number of heads	1
Power (W)	25

Physical

Colour	Polycarbonate
Length (mm)	140
Net weight (kg)	0.32
Package height (mm)	70
Package width (mm)	190
Package length (mm)	205
IP internal	44



Download

[Mounting instructions](#)  PDF


[Spare Parts](#)  PDF

Photometric Files

[LDT / IES](#)  LDT



Schematic light drawing



Beam Angle: 164°

h(m)	E(lx)	D(m)
1	19	14.44
2	5	28.88
3	2	43.32
4	1	57.76
5	1	72.20

Luminous flux Luminaire
230 lm

Photometric

Light distribution

Roto symmetric

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Bulbs



NOT INCLUDED

RF26520

LED Lamp 2W 240lm G9 220-240 2700K T13 Non Dimmable




NOT INCLUDED

RF28425

LED BiPin Lamp G9 3W 2700K Non Dimmable

Spare Parts

- | | | |
|-----|---------------------------------|-----------|
| 01. | G9 5600 lamp holder | RF12818 |
| 02. | Polybarbonate diffuser assembly | RF1491109 |

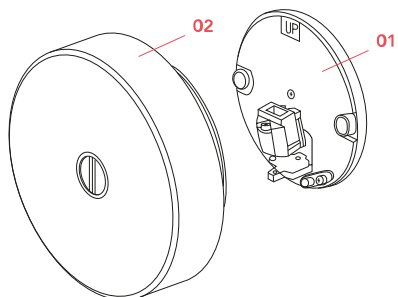

DOWNLOAD



RF12818

G9 5600 lamp holder



RF1491109

Polycarbonate diffuser
assembly