



2642

Design By Arik Levy

Ceiling light where different cubic volumes meet or expand to provide flexible solutions, maintaining spatial order.


Model Sheet

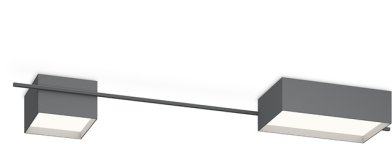

Finish	21 Black Grey NCS S 7000-N
	15 Grey L2 NCS S 2500-N
LED temperature color	3000 K / 3500 K / 4000 K
Dimming	CASAMBI / DALI / 1-10V


Installation type Surface Canopy

Materials Body: Aluminum
Diffuser: Polycarbonate
Profile: Aluminum

LED  CRI>90
3000 K / 3500 K / 4000 K

Driver Constant Voltage 110-240 V V
50-60 Hz HZ

Remarks Main input by the biggest box




Application Ceiling Lamps

Packaging 3 Box
0.38 m x 0.61 m x 0.22 m
Gross weighg 9.8
Net weighg 7.95
Vol. 0.0947

Lighting effect

General Lighting


Lamp for general lighting with an opaque shade and distributing light upwards and/or downwards mainly.



Photometric Data

Efficiency 72.42 lm/W
Coordinate System CG
Total Flux 4634.73 lm
Maximum Value 427.37 cd/klm

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com