


## 2617

Design By Arik Levy

Wall light that marks coordinates with a rectilinear language, connects points of light in space, relates planes and underlines the architectural dimension. Indirect lighting and composition based on volumes clarify light and shade.

### Model Sheet

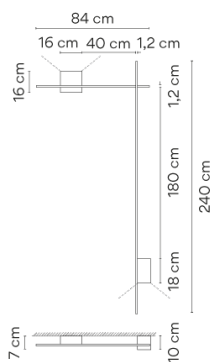

**Finish**


- 15 Grey L2  
NCS S 2500-N
- 21 Black Grey  
NCS S 7000-N

**LED temperature color** 3000 K / 3500 K / 4000 K

**Dimming** DALI / 1-10V / CASAMBI




**Installation type** Surface Canopy

**Materials** Body: Aluminum  
Diffuser: Polycarbonate  
Profile: Aluminum

**LED**  CRI>90  
3000 K / 3500 K / 4000 K

**Driver** Constant Voltage 110-240 V V  
50-60 Hz HZ

**Remarks** Only one main input by square box 16x16cm.

  **Dimmable** **LED**  
**IP20** **Bi-volt** **50-60Hz** 


**Application** Wall Lamps

**Packaging** 2 Box  
0.224 m x 0.325 m x 0.37 m  
Gross weight 5.2  
Net weight 2.8  
Vol. 0.0384

#### Lighting effect

##### General Lighting


Lamp for general lighting with an opaque shade and distributing light upwards and/or downwards mainly.



#### Photometric Data

**Efficiency** 100.00%  
**Coordinate System** CG  
**Total Flux** 378.81 lm  
**Maximum Value** 166.08 cd

#### Other Applications



All of our products come with a five-year warranty. Check our legal terms at [www.vibia.com/warranty](http://www.vibia.com/warranty)

**Vibia Lighting, S.L.U.**

**Office / Oficina**  
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

**International** T +34 934 796 971  
**Spain / Portugal** T +34 934 796 970

customer.service@vibia.com  
vibia.com