


FLOS

03.9475.14A Black/White

Light Shadow Adjustable No Trim 12 Spots Optic Flood

Designed by FLOS Architectural

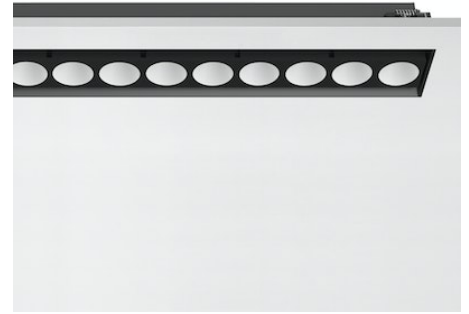

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

| | |
|------------------|---------------------|
| Mounting | Ceiling recessed |
| Environments | Indoor dry location |
| LED type | Power LED |
| Lamp category | LED |
| Iicos | No |
| Number of heads | 1 |
| Power (W) | 32.4 |
| Source flux (lm) | 3420 |
| System flux (lm) | 2836 |

Physical

| | |
|--------------------------|-------------|
| Colour | Black/White |
| Trim | No |
| Orientation | Adjustable |
| Longitudinal tilting (°) | 30 |
| Recessed depth (mm) | 75 |
| Length (mm) | 429 |
| Net weight (kg) | 0.66 |
| IP internal | 20 |
| IP external | 20 |

Drawing Thumbnail

Download

Mounting instructions [↓ ZIP](#)

Photometric Files

LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

 Bim [↓ ZIP](#)



Schematic light drawing



Beam Angle: 33°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1 | 8841 | 0.59 |
| 2 | 2210 | 1.18 |
| 3 | 982 | 1.78 |
| 4 | 553 | 2.37 |
| 5 | 354 | 2.96 |

Luminous flux luminaire
2836 lm (EXTREME CUT OFF)

Photometric

| | |
|------------------------|-----------|
| Lighting type | Direct |
| Light distribution | Symmetric |
| CCT (K) | 3000 |
| CRI> | 90 |
| Beam angle C0-180 (°) | 33 |
| Beam angle C90-270 (°) | 33 |

Electrical

| | |
|-----------------------------------|-----------------|
| Insulation class | II |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 220.00 |
| Alternating current voltage (Vac) | 230 |
| LED voltage Vf (Vdc) | 36 |
| Driver | Remote included |
| Dimmable | No |
| Emergency type | No |

Notes

It requires a pre-installation frame, to be ordered separately.

Accessories & Power Supply




REQUIRED
Frame

Installation

08.0518.00

Pre-installation No Trim Frame
12L Fix Adjustable

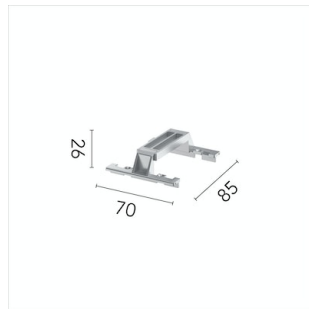

OPTIONAL
Accessory

Mounting

08.0059.90

Accessory for mounting of No
Trim Adjustable continuous line.