


PHILIPS

Decoflood

Decoflood floodlight IR

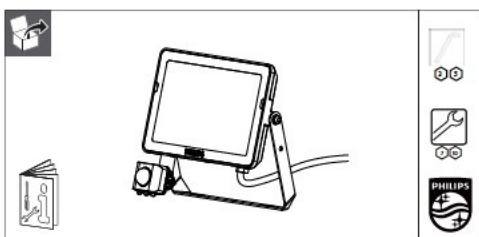

CE outdoor

220V 240V 50Hz 60Hz

IK06 IP65

Max. 80°C Min. 0 -40°C Ta



LED

RG-T

2m

3

	Flux (lm)	Power (W)	Beam	m ²	kg
Decoflood floodlight IR black lx20W G2	1800	20		0.006	0.38
Decoflood floodlight IR black lx50W G2	4500	50	100°-120°	0.018	0.72

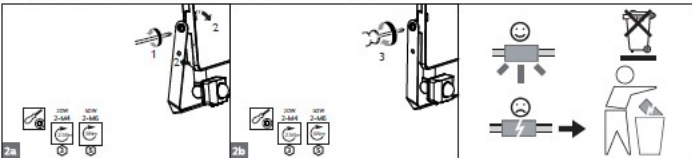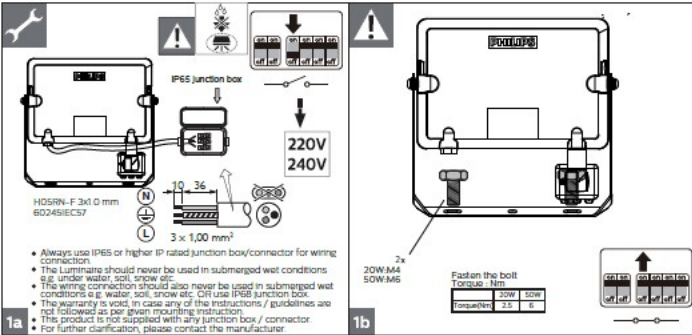

- Luminaire must not be used or stored in corrosive environment where hazardous materials such as sulphur, chlorine, phthalates, etc. are present.