

PRODUCT



Item no.: 001-0310X
+ style code

DESCRIPTION

Bestlite has been in continuous production since 1930. Robert Dudley Best created Bestlite design. He was highly influenced by the Bauhaus. In the past 80 years, people appreciated the lamps and it decorates many homes, hotels and restaurants worldwide. Loved by architects, designers and design aficionados throughout its 80-year history, today, Bestlite enjoys global iconic status.

VERSION - BESTLITE FLOOR LAMP BL3S

Shade and base: Powder coated aluminium
Tube and arm: Chromed steel

RAL codes are indicative.

- Fabric wire - Black:
- Black / White inside // RAL 9004 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - Off-White:
- Off-White / White inside // RAL 1015 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - White:
- White / White inside // RAL 9003 / RAL 9003 // Gloss level 20 / Gloss level 20


Please contact us for other colours or finishes.

VERSION

Order item - look for part number in the pricelist.

Series contains the following:

BL3S, BL3M, BL3 Original shade, BL4

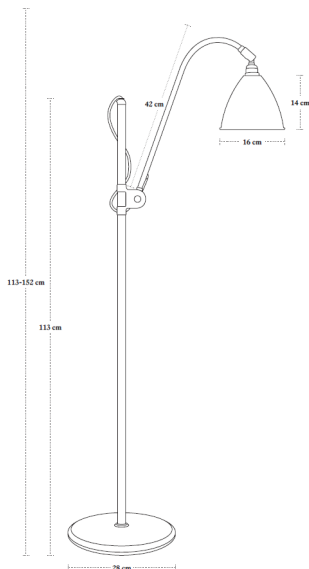

COLOURS



FACTS

MEASUREMENT - L X W X H MM

Lamp height: 1130-1520 mm
Lamp stand: Ø280 mm
Shade height: 140 mm
Shade diameter: Ø160 mm
Cord - total length w/sw: App. 4500 mm
Cord - exposed out of lamp: App. 4230 mm

WEIGHT ITEM - LAMP INCL. WIRE
5426 g

PACKAGING TYPE

White cardboard box w/ 5ply corrugated

PACKAGING MEASUREMENT - L X W X H CM

L:34 x W:37 x H:120 cm

WEIGHT PACKAGING - MATERIAL TYPE

- LD EPE foam bund: 68,5 g
- LD EPE foam top: 148,5 g
- LD EPE foam top: 75,5 g
- Bestlite key: 18 g
- PE polybag: 1 g
- PE polybag: 180g
- Cardboard inside: 23 g
- Cardboard outside: 1713 g
- Strapping: 7 g

WEIGHT PACKAGING - TOTAL

7742 g

NUMBER OF PARCELS

1 pcs.

LIGHT SOURCE:

- Socket: E14 base
- Recommended light source: *All fluorescens light bulbs*
- Recommended wattage: 9 W = (40 WATT incandescent bulbs)
- Max wattage: 13 W

- Recommended light source: *Halogen light bulb*

- Recommended wattage: 28 W = (40 WATT incandescent bulbs)
- Max wattage: 28 W

- *All lamps can be fitted with a dimmer.
Please contact your local electrician.*

- *Lightbulb not included*

CLEANING AND MAINTENANCE

Use a soft damp cloth when cleaning your Bestlite lamp. Do not use household cleaners.

ACCESSORIES

-

ENVIRONMENT


-

TESTS

-

CERTIFICATION AND LABELS

CE-CERTIFIED

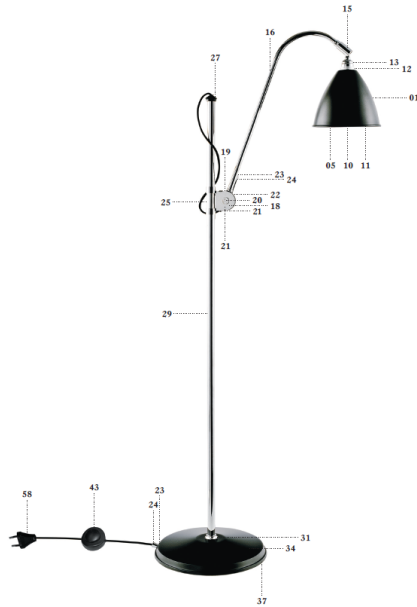

STANDARD

STOCK - BL3S: Floor lamp

- Euro plug: Type C, 2 PIN, 2,5 amp
- Euro voltage: 230 V
- Frequency: 50 Hz
- Supply voltage: AC power ~
- Normally Closed IP20



Class II / Double insulated



CE-Mark



Luminaires accepted for mounting on a flammable base

KOMPONENTS

- 01 // Shade, 115,5 g
- 05 // Lamp holder
- 10 // Insulating ring
- 11 // Internal shade ring
- 12 // External shade ring
- 13 // Lamp holder cover
- 15 // Universal joint
- 16 // Bestlite arm
- 18 // Bestlite clip
- 19 // Bestlite nut
- 20 // Bestlite bolt
- 21 // Tension spring
- 22 // Fibre washer
- 23 // Cord grip
- 24 // Cord grip cover
- 25 // Acetate
- 27 // Top knob with hole
- 29 // Tube
- 31 // Collar
- 34 // Base cover
- 37 // Feltac
- 38 // Textile covered cord
- 43 // Foot switch
- 58 // Plug

Item no.: 001-0310X

14 // Bestlite key

MATERIAL

Shade and base: Powder coated aluminium
Tube and arm: Chromed steel
Textile covered cord

INSTALLATION INSTRUCTIONS

The Bestlite key:

It's a practical tool that enables you to fasten the lamp arm. Simply use it like a screwdriver in the slot in the Bestlite nut.

1) Read the instructions carefully and use them as a guide for the correct placement of the holes. Always use the supplied key.



Technical information:

Light source: E14 E-27 Incandescent or E14/E27 Halogen bulb.
Not power of other lighting bulbs.
The lamp is not approved for outdoor use or use in damp/bath rooms.

Some advice on cleaning your Bestlite:

Powder coated parts - base, bracket and shade:
Wipe the parts with a damp cloth. Avoid using water and a lot of acid detergent.

Chrome plated parts:
Wipe the parts with a damp cloth. Avoid using water and a lot of acid detergent.

Use only soft cloth for wiping and polishing, never detergent or other acid.

Do not use abrasive household cleaners.
Do not use acidic or alkaline cleaning methods, glass cleaner or household products.

BESTLITE - GUBI (B&B) A/S, DK-2100, Copenhagen, Denmark - www.bestlite.com

Your Bestlite contains:

Completions on your Bestlite:
The shade, lamp holder, insulating ring, internal shade ring, external shade ring, lamp holder cover, universal joint, Bestlite arm, Bestlite clip, Bestlite nut, Bestlite bolt, tension spring, fibre washer, cord grip, cord grip cover, acetate, top knob with hole, tube, collar, base cover, feltac, textile covered cord, foot switch, plug.

Do not use the Bestlite key to fasten the lamp arm. Simply use it like a screwdriver in the slot in the Bestlite nut.

Use the Bestlite key to fasten the lamp arm. Simply use it like a screwdriver in the slot in the Bestlite nut.

Use the Bestlite key to fasten the lamp arm. Simply use it like a screwdriver in the slot in the Bestlite nut.

Use the Bestlite key to fasten the lamp arm. Simply use it like a screwdriver in the slot in the Bestlite nut.

Use the Bestlite key to fasten the lamp arm. Simply use it like a screwdriver in the slot in the Bestlite nut.

BESTLITE - GUBI (B&B) A/S, DK-2100, Copenhagen, Denmark - www.bestlite.com

BESTLITE
SINCE 1930

