

FLOS

F6405009 Glossy White


Skygarden Small

Designed by Marcel Wanders, 2020



LED retrofit - 10W

Hanging lamp with diffuse light. Plaster dome with white interior and exterior finishes in the following colours: rust, shiny black, shiny white, or opaque gold. Dome support in aluminium alloy. Diffuser in blown milk glass. Decoration in photoengraved and deep drawn stainless steel. Polycarbonate rose in the same colour as the dome.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607034972
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	LED retrofit
Lamp type	T28
Lamp holders	E14
Bulb finish	Frosted
Number of heads	1
Power (W)	10
System power (W)	10

Physical

Colour	Glossy White
Length (mm)	400
Cord length (mm)	2700
Canopy dimension (mm)	36
Canopy width (mm)	146
Net weight (kg)	5
Package height (mm)	340
Package width (mm)	550
Package length (mm)	550
Package volume (m3)	0.1
IP internal	20

Download

[Mounting instructions](#)  PDF

[Spare Parts](#)  PDF

Photometric Files

[LDT / IES](#)  LDT


Technical Drawings

[3D](#)  ZIP

[Bim](#)  ZIP



Schematic light drawing



Beam Angle: 133°

h(m)	E(lx)	D(m)
1	107	4.59
2	27	9.18
3	12	13.77
4	7	18.37
5	4	22.96

Luminous flux Luminaire
689 lm

Photometric


Light distribution

Symmetric

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No


Bulbs



INCLUDED

RF32290

LED Lamp E14 8W 2700K T28



NOT INCLUDED

RF32291


LED Lamp E14 8W 3000K T28



NOT INCLUDED

RF32767

LED Lamp 9W E14 220-240V
2700K T28




NOT INCLUDED

RF32768

LED Lamp 9W E14 220-240V
3000K T28

Spare Parts

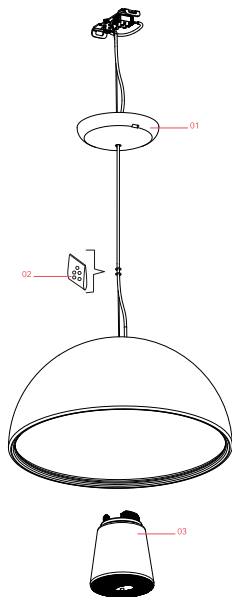

01. White rose assembly

RA3690209

03. Kit of 5 or rings

RF05382

DOWNLOAD



RA3690209

White rose assembly



RF05382

Kit of 5 or rings